

Exclusively by:




**PACIFIC
INTERLOCK
PAVINGSTONE INC.**




Bullnose

The finishing touch. The Bullnose is the perfect compliment to any pavingstone project that involves a retaining wall or steps. This exclusive paver is available in our 6 most popular colors and will provide an impressive custom look to any project.

Bullnose




9.00 x 3-3/8 x 2.3/8"
 3 units per linear foot
 with 1/2" groutline.
 320 Stones/Pallet
 Available colors:
 Red, Tan, Charcoal,
 Brown, B1, B3, B4,
 B5, B6, B7, B9, B10

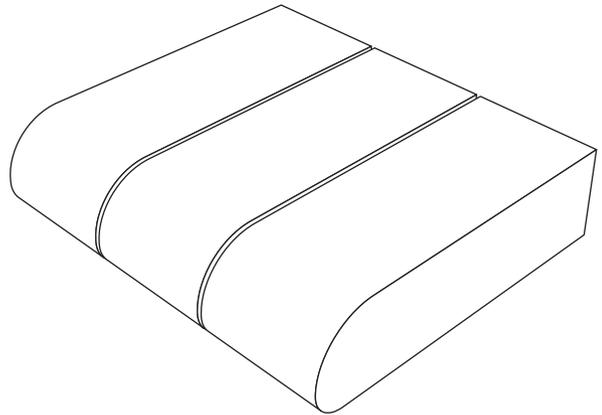

Creating Steps or Coping

- 1. Measure the step's layout.** Remove and dispose of all surface vegetation and debris (this cannot be used as backfill.) Dig the base trench to the width and depth necessary to bury 2" of block plus 2" more for base rock. Then level the excavated pad. Fill and compact 2" of base rock the length of the step.
- 2. The key to attractive steps is to make sure the base course of block is level.** Place blocks closely together, leaving the top 2/3 of the block exposed and checking the level and alignment of each block. For straight lines, use a string line along the back of the course and make sure the blocks are flush. Use a rubber mallet to "fine-tune" the placement of the blocks. Fill in behind the step compacting 2" layers of base rock to the top of the block.
- 3. Using mortar or cement adhesive,** install the Bullnose on top of the block. Lay the next course of block behind the Bullnose with an offset, or stagger, from the course below. You may need to cut a block to achieve the necessary offset. Be sure to level and align the blocks as you go.
- 4. Repeat steps 2 and 3 for additional steps.** Finish the top step with pavers on a 1" bed of sand. One attractive option is to create a longer tread by installing pavers between the Bullnose and the next riser.

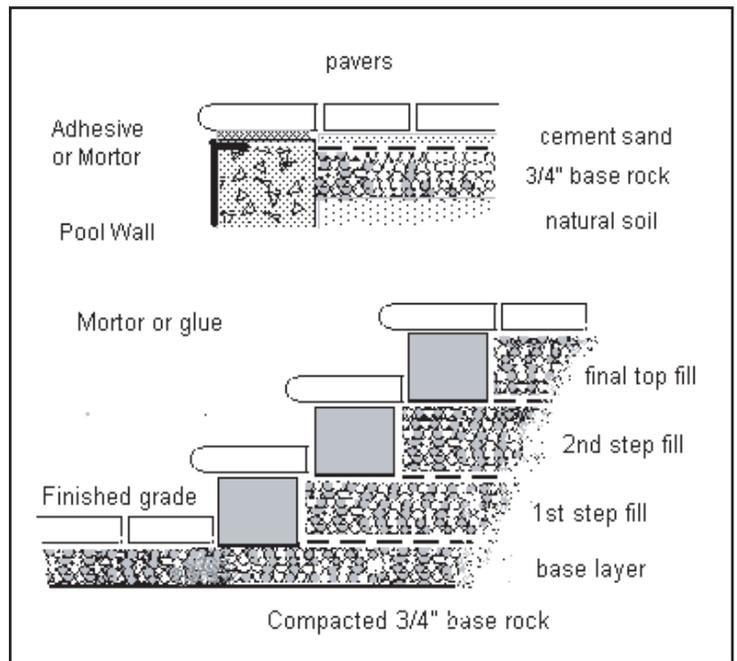

**PACIFIC
 INTERLOCK
 PAVINGSTONE INC.**

Plant:
 1895 San Felipe Road
 Hollister, CA 95023
 831.637.9163 phone
 831.637.0756 fax

Sales Office:
 1195 South De Anza Blvd.
 San Jose, CA 95129
 408.257.3645 phone
 408.257.3849 fax



www.pacinterlock.com